

Employ Loop & Lines

Interface®

Perfect Synergy

The Employ collection offers great value for money, and allows for more creative design options to fit any space. Employ Loop has a level surface and offers a great wall-to-wall aesthetic. Employ Lines has a strong linear pattern, suitable for non-directional or monolithic installation, which can be used as the ideal transition between bright, bold and neutral colourways in the Employ loop range.

Employ Loop & Lines are carbon neutral throughout their full lifecycle.





PRODUCT EMPLOY LOOP COLOUR TROPICAL INSTALLED MONOLITHIC
PRODUCT EMPLOY LINES COLOUR CARIBBEAN INSTALLED DESIGN BY TILE




PRODUCT EMPLOY LOOP COLOURS TRUFFLE, RAFFIA & NUTMEG INSTALLED MONOLITHIC
PRODUCT EMPLOY LINES COLOUR HARVEST INSTALLED NON DIRECTIONAL



PRODUCT EMPLOY LOOP COLOURS ASH & GRITSTONE INSTALLED MONOLITHIC



PRODUCT EMPLOY LOOP COLOURS KIWI & JET INSTALLED MONOLITHIC
PRODUCT EMPLOY LINES COLOUR MEADOW INSTALLED DESIGN BY TILE

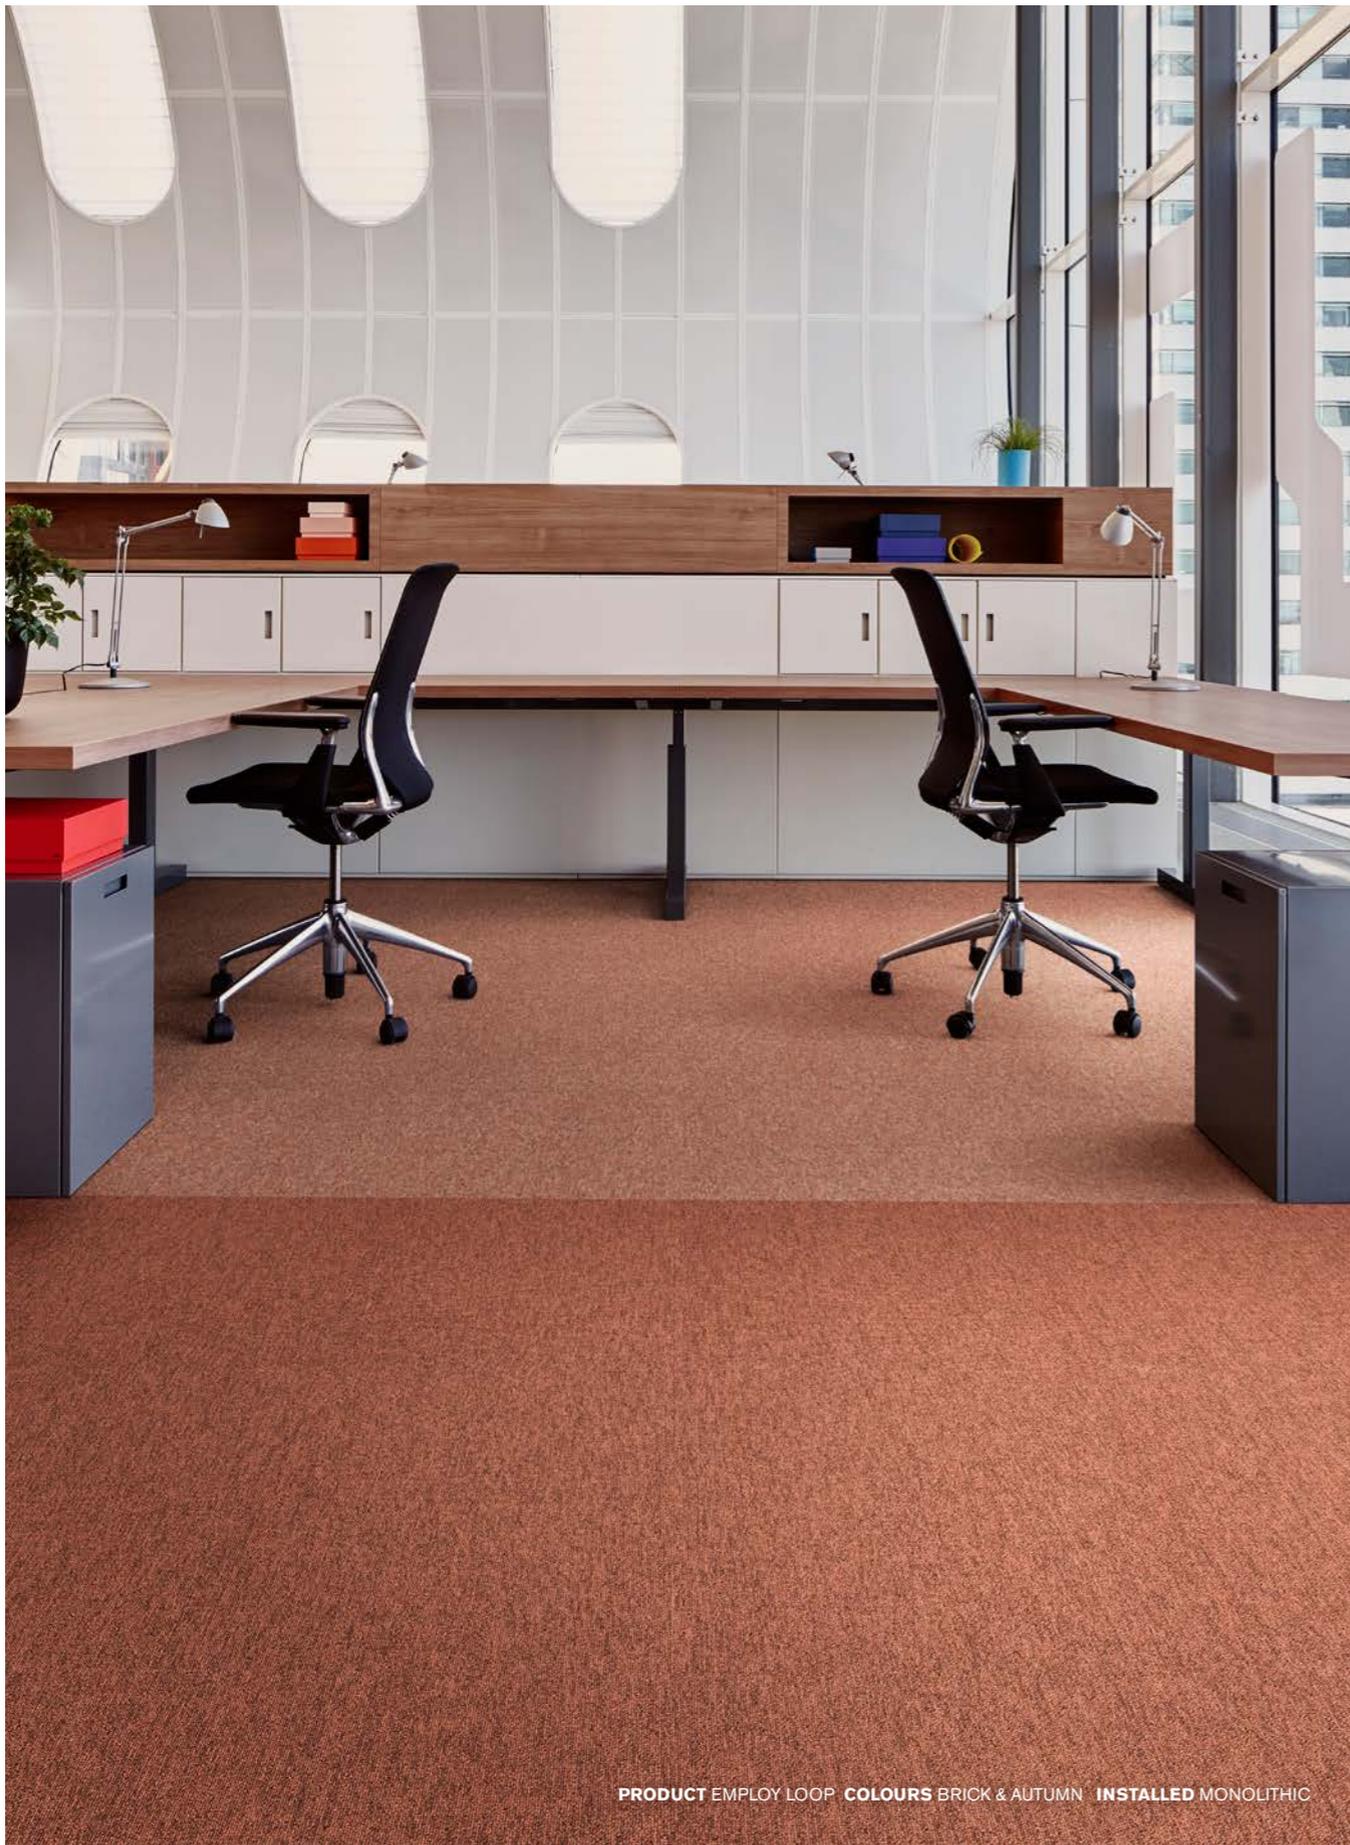





Employ Loop Colour Range



4197026 GROUND



4197027 URBAN



4197008 FOUNTAIN



4197013 CRYSTAL



4197036 INK



4197023 LAVENDER




4197001 RAFFIA




4197004 CARAMEL



4197007 NUTMEG




4197028 ASH



4197030 GRITSTONE



4197011 CIRRUS



4197016 NORDIC



4197014 TROPICAL




4197017 PEACOCK



4197024 SALSA



4197033 BRICK



4197032 AUTUMN



4197025 COTTON



4197029 GRANITE



4197006 SHALE



4197019 BARING



4197012 ATLANTIC



4197022 SAPPHIRE



4197021 CLEMENTINE



4197031 SANDS



4197015 KIWI



4197002 TRUFFLE



4197005 PRALINE




4197010 RYE



4197020 OXFORD



4197003 SHADOW




4197009 JET



4197034 FERN



4197018 EDEN



4197035 EVERGLADE

Specification

Style Code	4197
Product Construction	Tufted Level Loop Pile
Yarn System	100% Solution Dyed Nylon
Machine Gauge	1/10
Pile Thickness	2.5 ± 0.5mm (Asia) 2.4 ± 0.5mm (Australia & New Zealand)
Total Thickness	4.5 ± 0.5mm (Asia) 4.5 ± 0.5mm (Australia & New Zealand)
Tile Size	50 x 50cm
Area of Use	Commercial - Heavy Use
ACCS Grading	Commercial Extra Heavy Duty & Stairs
(Australia & New Zealand Only)	
Lifetime Antimicrobial	Intersept®

View the full product specification on interface.com

Installation Methods





PRODUCT EMPLOY LINES COLOUR FORMATION INSTALLED NON DIRECTIONAL

Employ Lines Colour Range



4223001 HARVEST



4223002 FORMATION



4223003 QUARRY



4223004 WATERFALL



4223005 SUNSET



4223006 MEADOW



4223007 IRIDESCENT



4223008 CARIBBEAN

Specification

Style Code	4223
Product Construction	Tufted Patterned Structured Loop Pile
Yarn System	100% Solution Dyed Nylon
Machine Gauge	1/10
Pile Thickness	2.5 ± 0.5mm (Asia) 2.4 ± 0.5mm (Australia & New Zealand)
Total Thickness	4.5 ± 0.5mm (Asia) 4.5 ± 0.5mm (Australia & New Zealand)
Tile Size	50 x 50cm
Area of Use	Commercial - Heavy Use
ACCS Grading	Commercial Extra Heavy Duty & Stairs
Lifetime Antimicrobial	Intersept®

View the full product specification on [interface.com](https://www.interface.com)

Installation Methods



Why Our Modular Flooring?




Modular Flooring

Performance and flexibility. Interface's standard backing systems set the industry standard for modular performance. Tiles stay on the floor with no upcurl, no tapping and no rippling effect, yet are easy to selectively replace. Our modular carpet is easier to handle than bulky roll carpet and produces an average of just 2-5% waste compared to roll carpet's average of 15%. And it installs seamlessly with our LVT, no transition strips needed.



Carbon Neutral Floors™

Create a climate fit for life. All Interface flooring sold globally is third party verified carbon neutral across the entire product lifecycle. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder, including the emissions from raw materials, our manufacturing processes and product use to end of life.



TacTiles®

No glue installation. Our revolutionary TacTiles installation system eliminates the need for glue, adhering tiles securely together to form a floor that "floats" for greater flexibility, easier replacement and long-term performance. The result? Less mess, less waste and virtually no VOCs, not to mention an environmental footprint that is over 90% lower than that of traditional glue adhesives.




Intersept®

Mold protection. Our proprietary preservative, Intersept, protects our modular carpet against mould growth and odour-causing bacteria—guaranteed. Intersept treated carpet, with proper maintenance, shows no mould or bacterial growth when tested as per the ASTM E2471 Standard Test Method. Intersept is EPA-approved for safe use in carpet, water insoluble and contains no halogens, heavy metals, phenols or formaldehyde.



Protekt®

Stain protection. The life and performance of your flooring is extended with Protekt, our patented stain resistant coating. Protekt uses advanced technology to provide a lasting barrier against permanent soiling and staining, which simplifies the cleaning process and enhances the longevity of your carpet.



ReEntry

At Interface, an *end of life solution* of our products is a reality. ReEntry is our innovative programme to reclaim materials used in our product. Taking back our product at end of life is a service we provide our customers to ensure that none of the products they use will end up in landfill. Whether it is recycling into new product or re-purposing, we see our customer's waste as an opportunity for new product life.



Health Product Declaration (HPD) –

A transparency tool for evaluating whether a product supports Green Chemistry. As part of our work on Health and Materials, Interface continuously reduces the environmental and health impacts of our products through elimination of materials of concern.



15-Year Warranty

Interface products are warranted for 15 years against excessive surface wear, edge ravel, backing separation, shrinking, stretching and static electricity even under castor chair conditions.



Local Manufacturing

We combine local responsiveness with a global experience. Being part of the same communities as our customers, we foster collaborative, committed, and productive relationships. Our carpet tiles are manufactured in Australia and China, contributing to local economies and the environment.

Third Party Certifications



Environmental Product Declaration (EPD)

The Environmental Product Declaration (EPD) is a third party verified environmental certification classified as Type III that quantifies and verifies the lifecycle impacts of products and goods according to the International Standards Organization (ISO) 14025, 14040, 14044 and EN 15804. EPDs help customers that are environmentally driven to evaluate the performance of a product and to make the best decision when choosing a product. All Interface products have EPDs.



Global GreenTag GreenRate - Level A

Global GreenTag's GreenRate certification is a product rating system recognised by the Green Building Council of Australia, New Zealand and South Africa. It has been set up to meet the criteria of the Green Star® "Sustainable Products" credits. All Interface products are certified "Level A".



Environmental Certification Scheme - Level 4

ECS-certified carpet manufacturers must adhere to a code of practice that details performance standards for raw materials, manufacturing, in-service use and end-of-life treatment. Interface flooring holds the highest grading under ECS.



NSF Certification

NSF International develops public health standards and certification programs that help protect the world's food, water, consumer products and environment. Interface carpet tile products are certified "Gold".



CRI Green Label Plus

The Carpet and Rug Institute (CRI) Green Label Plus sets higher standards for indoor air quality and ensures that customers are purchasing the very lowest emitting products on the market. Interface Carpet Tiles and TacTiles have fulfilled the requirements for this certification.



Singapore Green Building Product (SGBP)

The SGBP certification is designed to evaluate and certify building products that meet specific sustainability and environmental performance criteria. The certification scheme helps building professionals identify products that are sustainable and more carbon efficient. Interface carpet tile products are certified "Leader" and LVT products are at "Excellent" Level.



Best Practice Guidelines for PVC

A comprehensive standard for better PVC developed by the Green Building Council of Australia under its Green Star programme. Interface holds Lloyd's Statement of Compliance (Green Building Council of Australia Best Practice Guidelines 2013) for Best Practice PVC for all products made in Australia.

Our EPDs and certifications contribute credits towards Green Building Council's Green Star® rating system.

Green Star credits are approved by the Green Building Councils of Australia and New Zealand. The internationally-recognised Green Star rating system provides independent verification that a building or community project is sustainable. Developed by the Green Building Council of Australia, Green Star is Australia's only national, voluntary, sustainability rating system for buildings and communities.



Carbon Neutral Floors™

www.interface.com

Australia

Interface Australia
local toll free: 1800 804 361

India

Interface India
tel: +91 80 4613 1313

South East Asia

Interface Asia
tel: +65 6478 1510

South Korea

Interface South Korea
tel: +82 2 555 1734

Japan

Interface Japan
tel: +81 3 5733 5211

Beijing

Interface China
tel: +86 10 6590 7810

Hong Kong

Interface China
tel: +852 2802 0838

Shanghai

Interface China
tel: +86 21 6340 3868



Climate change is undeniable. And reversible. Our mission is to prove it. Join the #ClimateTakeBack and help create a climate fit for life.