

LEVEL SET™ COLLECTION LVT | NATURAL WOODGRAINS & STONES

Interface® Hospitality



With thoughtful consideration for design, performance and a sustainable path, we've created an offering of luxury vinyl tile to fit perfectly into the Interface Hospitality modular flooring system.

We debut with Level Set,<sup>™</sup> a collection of 36 options sorted into two groupings. Level Set Natural Woodgrains & Stones is a selection of 25cm x 1m planks and 50cm x 50cm squares in classic wood and stone looks. Level Set Textured Woodgrains & Stones, offered in the same formats, presents patterns inspired by distressed, reclaimed and exposed materials.

Level Set Collection is not only a perfect match to our Skinny Planks<sup>™</sup> and square carpet tiles, it is also a perfect fit in terms of thickness. This means you can easily install our resilient and soft flooring to create an integrated floor or inset rug in a guest room or public space, and move effortlessly from surface to surface without transition strips.

Level Set Collection is constructed with a backing similar to our carpet tiles—allowing for the unmatched ease of our glue-free TacTiles<sup>®</sup> installation system. And, of course, we've designed it with attention to our environmental footprint and the ability to feed our recycling program, ReEntry<sup>®</sup>.



B

A

**COVER**  
LVT PRODUCT: Natural Woodgrains  
SIZE: 25cm x 1m  
COLORS: Beech  
INSTALLATION: Ashlar

COLLECTION: Urban Retreat™  
CARPET PRODUCT: UR 102  
SIZE: 50cm x 50cm  
COLORS: Granite  
INSTALLATION: Non Directional

**PAGE 3 A**  
LVT PRODUCT: Natural Woodgrains  
SIZE: 25cm x 1m  
COLOR: Storm  
INSTALLATION: Ashlar

**B**  
FLOR PRODUCT: Collins Cottage™  
SIZE: 50cm x 50cm  
COLOR: Hound Linen  
INSTALLATION: Quarter-Turn

**A**  
LVT PRODUCT: Natural Woodgrains  
SIZE: 50cm x 50cm  
COLOR: Washed Maple  
INSTALLATION: Quarter-Turn

**B**  
COLLECTION: World Woven™  
CARPET PRODUCT: WW895  
SIZE: 25cm x 1m  
COLOR: Dale Weave  
INSTALLATION: Ashlar





PRODUCT: Natural Stones  
SIZE: 60cm x 50cm  
COLOR: Warm Impala Marble  
INSTALLATION: Non Directional



**A** PRODUCT: Natural Woodgrains  
SIZE: 25cm x 1m  
COLOR: Black Walnut  
INSTALLATION: Herringbone

**B** PRODUCT: Natural Woodgrains  
SIZE: 25cm x 1m  
COLOR: Washed Wheat  
INSTALLATION: Herringbone



B

A

PRODUCT SPECIFICATIONS

**General Product Information**

**Product Number**

A002

**Product Construction**

High Performance Luxury Vinyl Tile

**Class / ASTM F1700**

Class III Printed Vinyl Plank

**Wear Layer Thickness**

22 mil

**Total Thickness**

4.5 mm

**Backing Class**

Commercial Grade

**Finish**

Ceramor™ Coating

**Nominal Dimensions**

25cm x 1m (9.845 in x 39.38 in)

**Installation Recommendation**

Floating Floor with TacTiles® Glue-Free Installation System

**Performance**

**IIC Sound Rating**

(ASTM E492-09) 57 IIC

**Slip Resistance**

(ASTM D2047) >0.55 wet/dry, ADA Compliant

**Static Load Limit**

(ASTM F970) 1500 psi

**Flexibility**

(ASTM F137) Passes

**Resistance to Heat**

(ASTM F1514) Passes

**Resistance to Light**

(ASTM F1515) Passes

**Radiant Flux**

(ASTM E648) Class I

**Smoke Density**

(ASTM E662) Passes, ≤450

**Size & Squareness**

(ASTM F2055) Passes, +/- 0.016 in. per linear ft.

**Thickness**

(ASTM F386) Passes

**Dimensional Stability**

(ASTM F2199) Passes

**Residual Indentation**

(ASTM F1914) Passes

**Resistance to Chemicals**

(ASTM F925) Passes

**Environmental**

**Indoor Air Quality**

FloorScore®/CDPH 01350 Certified for low-VOC emissions

**Material Composition**

Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers

**Ingredients & Life Cycle Impacts**

Environmental Product Declaration

**Carbon Footprint**

3rd Party Verified Carbon Neutral

**Sustainability Assessment**

NSF/ANSI 332, Meets Certification Guidelines

**LEED v4**

Contributes to IEQ: *Low Emitting Materials*; M&R: *EPD* and *EPR*

**End of Life**

Fully Recyclable LVT to Carpet Tile Backing

**Packaging**

**Quantity per Carton**

26.91 sq. ft. (2.5 m<sup>2</sup>)

**Pieces per Carton**

10

**Weight per Carton**

47 lbs (21 kg)

**Cartons per Pallet**

40

**Pallets per Truckload**

20

**Technical Information**

**Installation**

See Interface LVT Installation Guidelines online

**Maintenance**

See Interface LVT Maintenance Guidelines online

**Reclamation**

Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)

**Warranty**

15 Year Limited Commercial Warranty

**Installation Methods**

Ashlar, Herringbone





COLORLINE



A00201 BLACK WALNUT



A00202 MADAGASCAR



A00203 CHESTNUT



A00204 BEECH



A00205 STORM



A00206 WINTER GREY



A00207 WASHED WHEAT



A00208 SAND DUNE



A00209 MAHOGANY



A00210 TEAK



A00211 WASHED MAPLE



A00212 CEDAR

**A** LVT PRODUCT: Natural Woodgrains  
SIZE: 28cm x 1m  
COLOR: Sand Dune  
INSTALLATION: Herringbone

**B** COLLECTION: World Woven  
CARPET PRODUCT: WW890  
SIZE: 25cm x 1m  
COLOR: Brown Dobby  
INSTALLATION: Ashlar





PRODUCT: Natural Woodgrains  
SIZE: 25cm x 1m  
COLOR: Chestnut  
INSTALLATION: Pattern By Tile



**A** LVT PRODUCT: Natural Woodgrains  
SIZE: 28cm x 1m  
COLOR: Winter Grey  
INSTALLATION: Ashlar

**B** COLLECTION: World Woven  
CARPET PRODUCT: WW895  
SIZE: 28cm x 1m  
COLOR: Fuchsia Weave  
INSTALLATION: Quarter-Turn



**A** LVT PRODUCT: Natural Stones  
SIZE: 50cm x 50cm  
COLOR: Cool Impala Marble  
INSTALLATION: Non Directional

**B** FLOR PRODUCT: Mod Café™  
SIZE: 50cm x 50cm  
COLOR: Star Linen  
INSTALLATION: Quarter-Turn



B

A



PRODUCT SPECIFICATIONS

**General Product Information**

**Product Number**

A001

**Product Construction**

High Performance Luxury Vinyl Tile

**Class / ASTM F1700**

Class III Printed Vinyl Tile

**Wear Layer Thickness**

22 mil

**Total Thickness**

4.5 mm

**Backing Class**

Commercial Grade

**Finish**

Ceramor™ Coating

**Nominal Dimensions**

50cm x 50cm (19.69 in x 19.69 in)

**Installation Recommendation**

Floating Floor with TacTiles® Glue-Free Installation System

**Performance**

**IIC Sound Rating**

(ASTM E492-09) 57 IIC

**Slip Resistance**

(ASTM D2047) >0.55 wet/dry, ADA Compliant

**Static Load Limit**

(ASTM F970) 1500 psi

**Flexibility**

(ASTM F137) Passes

**Resistance to Heat**

(ASTM F1514) Passes

**Resistance to Light**

(ASTM F1515) Passes

**Radiant Flux**

(ASTM E648) Class I

**Smoke Density**

(ASTM E662) Passes, ≤450

**Size & Squareness**

(ASTM F2055) Passes, +/- 0.016 in. per linear ft.

**Thickness**

(ASTM F386) Passes

**Dimensional Stability**

(ASTM F2199) Passes

**Residual Indentation**

(ASTM F1914) Passes

**Resistance to Chemicals**

(ASTM F925) Passes

**Environmental**

**Indoor Air Quality**

FloorScore®/CDPH 01350 Certified for low-VOC emissions

**Material Composition**

Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers

**Ingredients & Life Cycle Impacts**

Environmental Product Declaration

**Carbon Footprint**

3rd Party Verified Carbon Neutral

**Sustainability Assessment**

NSF/ANSI 332, Meets Certification Guidelines

**LEED v4**

Contributes to IEQ: *Low Emitting Materials*; M&R: *EPD and EPR*

**End of Life**

Fully Recyclable LVT to Carpet Tile Backing

**Packaging**

**Quantity per Carton**

26.91 sq. ft. (2.5 m<sup>2</sup>)

**Pieces per Carton**

10

**Weight per Carton**

47 lbs (21 kg)

**Cartons per Pallet**

40

**Pallets per Truckload**

20

**Technical Information**

**Installation**

See Interface LVT Installation Guidelines online

**Maintenance**

See Interface LVT Maintenance Guidelines online

**Reclamation**


Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)

**Warranty**

15 Year Limited Commercial Warranty

**Installation Methods**

Non Directional, Ashlar, Brick, Monolithic, Quarter-Turn





COLORLINE



A00101 JET MIST



A00104 WARM IMPALA MARBLE



A00102 MARONE DARK MARBLE



A00105 PIETRASANTA WARM MARBLE




A00103 COOL IMPALA MARBLE



A00106 BOTTICINO MARBLE

## WHY OUR MODULAR RESILIENT FLOORING?

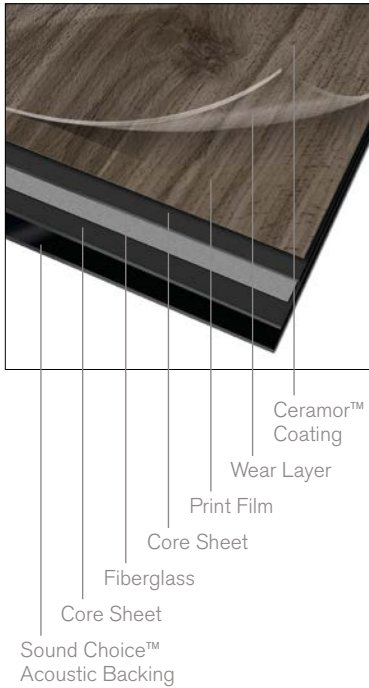

### Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save money.

### Glue-free Installation.

Create faster, cleaner and more flexible installations. Our TacTiles® installation system eliminates the need for glue, adhering tiles securely together to form a flexible, "floating" floor. Unlike click or adhesive-based products, simply lift, remove and replace damaged or worn tiles. The result? Less mess, less waste and virtually zero VOCs, not to mention an environmental footprint that is over 90% lower than that of traditional glue adhesives.

### Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac®RE recycled content backing through our ReEntry® program.

### High Performance from Top to Bottom.

From our Ceramor™ coating to our Sound Choice™ backing, we've designed our modular resilient LVT to provide peak performance in even the most challenging work environment while also providing superior sound absorption.

**Abrasion Resistance.** Our Ceramor ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better longer. Embossing adds texture to further enhance durability.

**A Strong Core.** Incorporating a fiberglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a glue-free installation and the ability to move and update with ease.

**Quiet Comfort.** With an IIC rating of 57, our Sound Choice backing provides superior protection against vertical sound transfer. Minimizing noise creates more comfortable spaces and enhances guest experience.

### Third Party Certification.

**Low Carbon Option.** ALL Interface LVT sold in North America is third party verified carbon neutral under our long-standing Cool Carpet™ program. Cool Carpet offsets all greenhouse gas (GHG) emissions associated with the entire lifecycle of the product.

**Environmental Product Declaration (EPD).** Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

**Sustainable Assessment.** Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

**Indoor Air Quality.** All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.


cool carpet™



CERTIFIED BY SCC Global Services

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer @ interface.com.

Install Interface Hospitality  
Modular Resilient Flooring and  
Modular Carpet with our TacTiles®  
glue-free installation system.  
No transition strip needed.

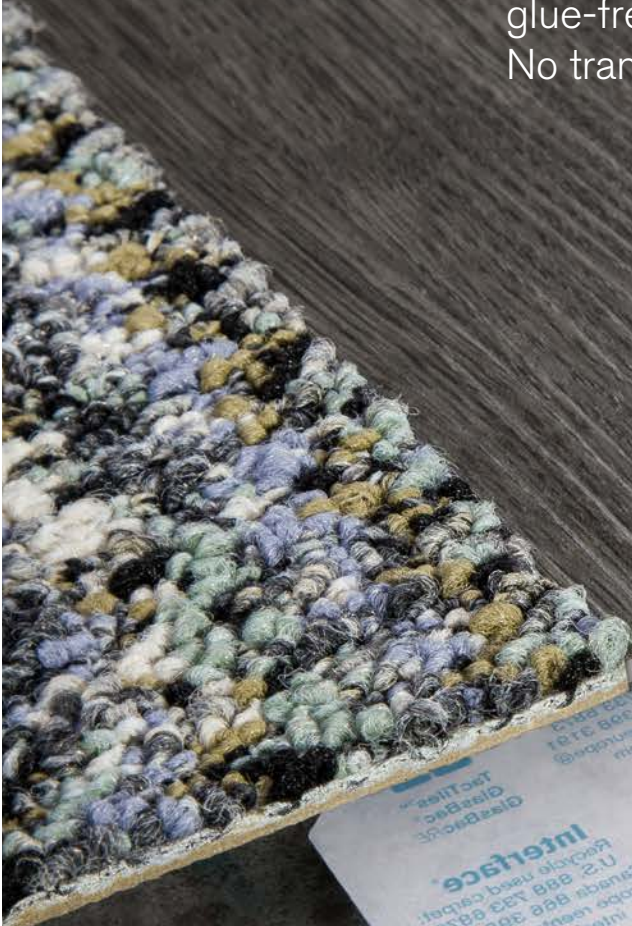

**B** COLLECTION: World Woven  
CARPET PRODUCT: WW895  
SIZE: 25cm x 1m  
COLOR: Heather Weave

**A** LVT PRODUCT: Natural Woodgrains  
SIZE: 25cm x 1m  
COLOR: Storm



**RECYCLED**  
Paper made from  
recycled material  
FSC® C009723



PLEASE RECYCLE

Printed on 50% post consumer waste (PCW)  
fiber manufactured using wind power.

We have tried our very best to accurately  
represent product colors. However, due to  
the nature of printed materials, color of actual  
products may vary slightly. Please request a  
sample to see actual product color.

[www.interfacehospitality.com](http://www.interfacehospitality.com)

**United States Headquarters**

1503 Orchard Hill Road  
LaGrange, GA 30240  
1.800.336.0225 ext.56511

**Canadian Headquarters**

233 Lahr Drive  
Belleville, ON K8N 5S2  
1.800.267.2149 ext.52128

**Brazilian Headquarters**

Rua Surubim, 577 - Conjuntos  
73/74 7º Andar  
04571-050 - São Paulo - SP  
+ 55 11 2196 0900

**Latin American Headquarters**

Montes Urales # 415 Piso 6  
Col. Lomas de Chapultepec  
México City, D.F. 11000  
Mexico  
+ 52 55 6395 5100

CIM # IFS00763 03/2017



**Mission Zero®**

our promise to eliminate any  
negative impact our company  
may have on the environment  
by the year 2020.