



**Simplicity, elevated. Spaces, illuminated.**

Sometimes, the simplest words make the strongest statement. That is also true for design. Northern Grain is bright, light and effortlessly beautiful — with a simplicity that enriches any space.

Northern Grain celebrates pale shades and clean neutrals. Invite and enhance natural light with airy off-white, beige and cream woods or set a quieter foundation with deeper soft browns and greys. The 12 colourways are divided across three subtle yet distinct woodgrain patterns. Honouring the gentle details of beech, ash and pine, each version of Northern Grain is crafted with fine lines, delicate knots and the soft ripples of cathedral peaks. With its understated and confident style, Northern Grain brings harmony to interior environments.

Interface LVT contains 39% recycled content and like all Interface flooring, Northern Grain is part of our Carbon Neutral Floors™ program. When you specify Interface flooring, you're on the path to a more sustainable space. You're choosing to reduce the carbon footprint of your space and help improve the health of the planet.







*Palette photography to show grain detail. Not meant for install on walls.*  
**PRODUCT** NORTHERN GRAIN **COLOUR** CHIFFON OAK



**PRODUCT** NORTHERN GRAIN **COLOUR** CHIFFON OAK **INSTALLED** HERRINGBONE





## Northern Grain Colour Range

---



A02601 GLAZED OAK



A02602 CHIFFON OAK



A02603 BARE OAK



A02604 DRIED OAK



A02605 NORDIC WASH



A02606 ANTIQUE WASH



A02607 DARK WASH



A02608 GREY WASH



A02609 AGED SATIN



A02610 NATURAL SATIN




A02611 OAK SATIN



A02612 DARK SATIN

*Palette photography to show grain detail. Not meant for install on walls.*

**PRODUCT** NORTHERN GRAIN **COLOUR** ANTIQUE WASH

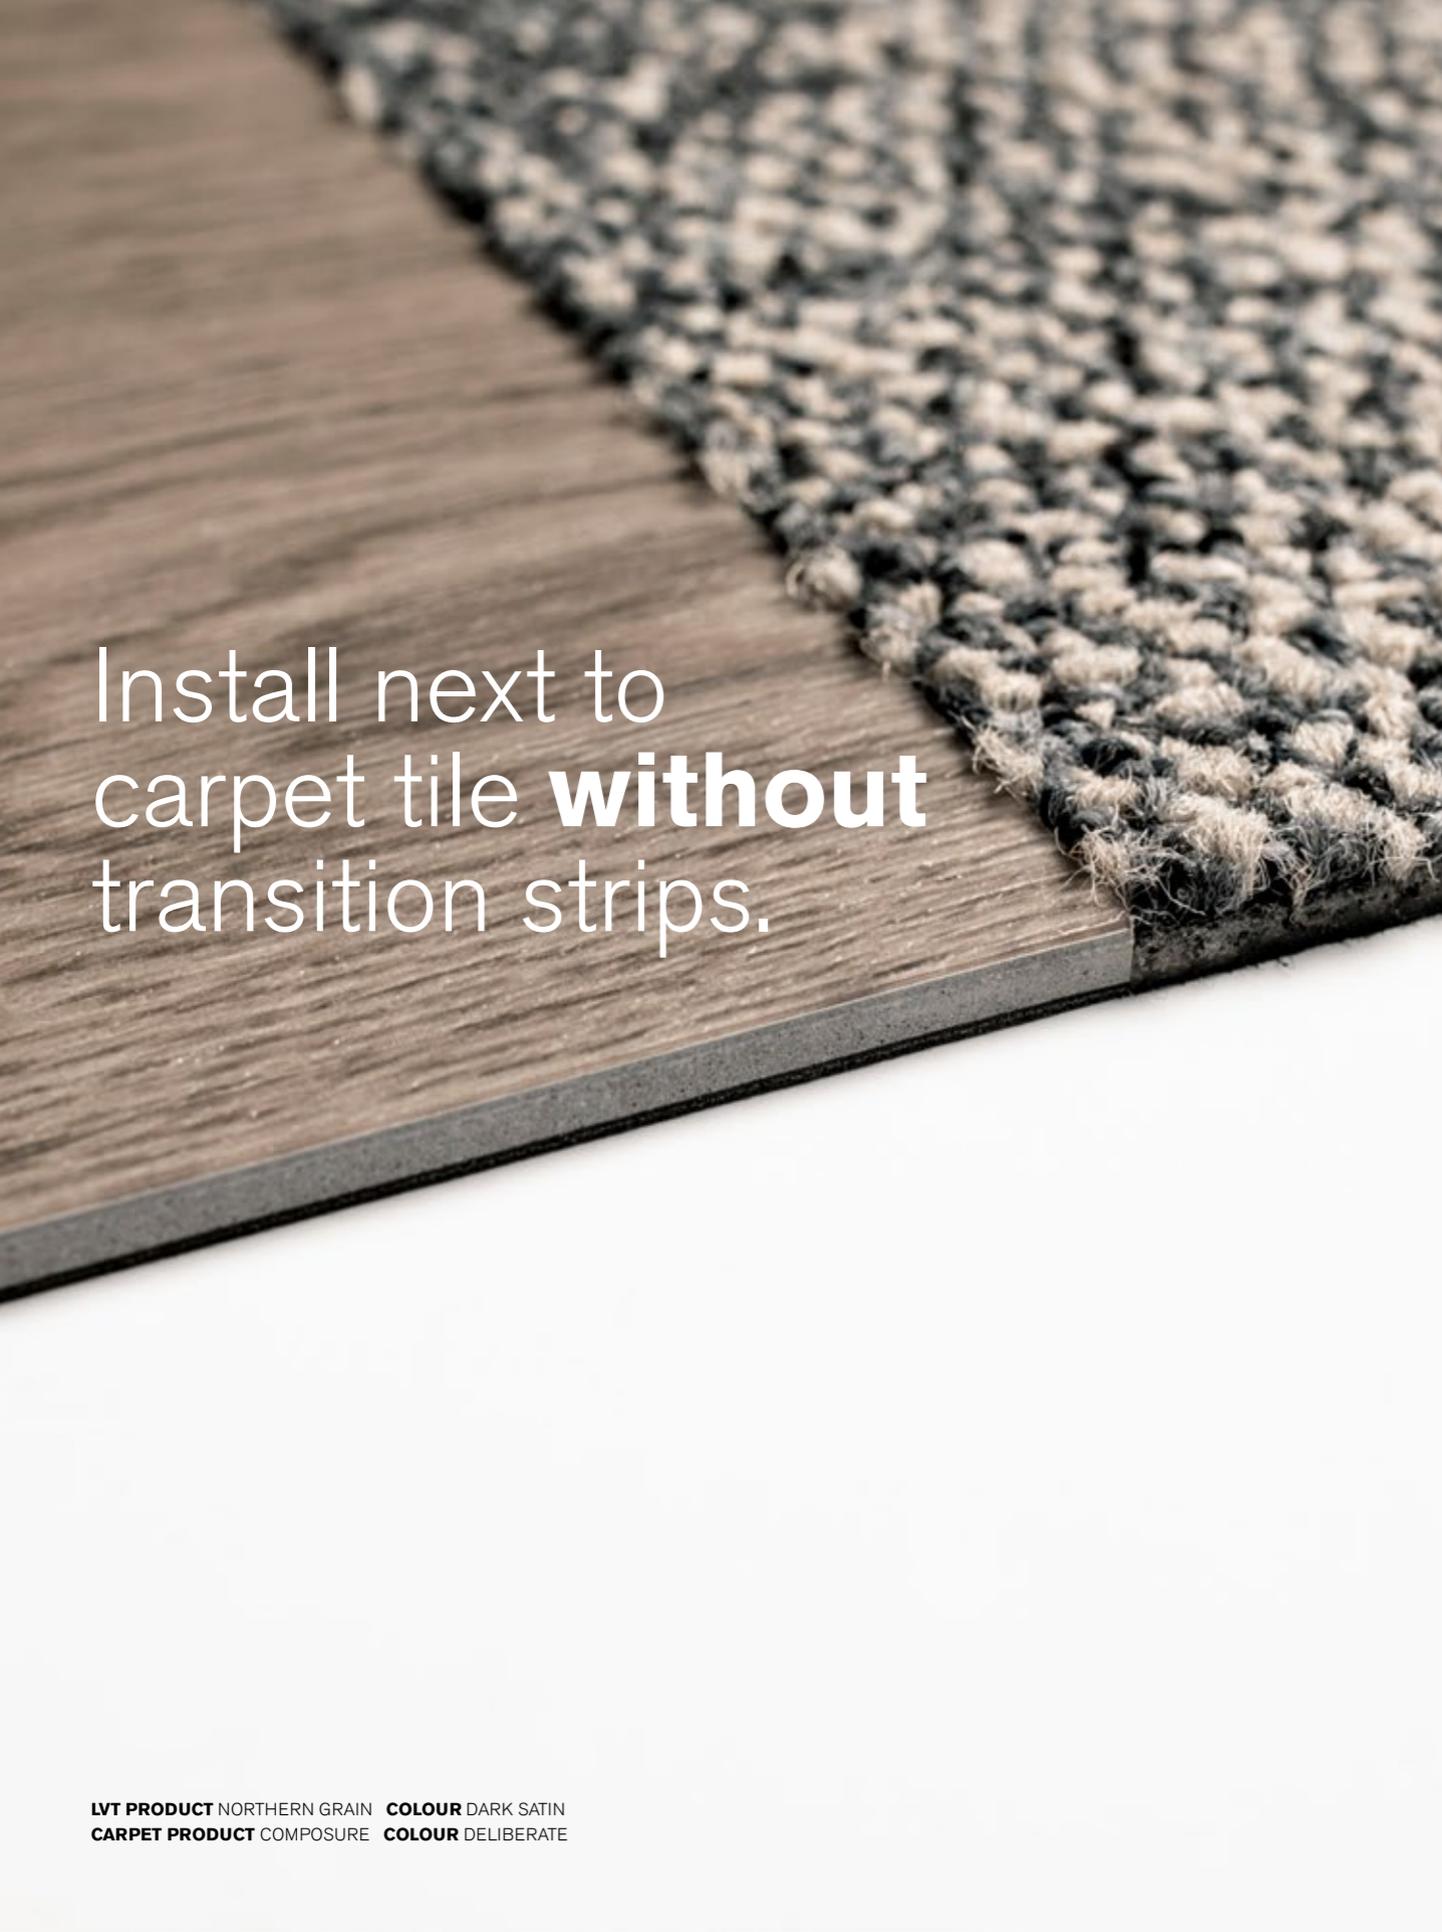

Install next to  
carpet tile **without**  
transition strips.

## Integrated System.

*Say goodbye to transition strips and doubling up.* Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

## Real Flexibility.

*Create a unique look that lasts.* Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

## Circular System.


*Keep flooring out of the landfill.* Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into new flooring through our ReEntry® program.

## Noise Reduction.

Less distractions. Interface is helping create +Positive spaces™ with our LVT with Sound Choice™ backing, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

## Including Ceramor+™ our upgraded LVT coating.

Upgrading our Ceramor™ ceramic bead coating to bring you Ceramor+™, the next step in slip-resistant LVT flooring technology, with all the performance you expect from Ceramor™. Ceramor+™ meets R10 and gives a standard P3 slip rating, indicating a low slip potential for Northern Grain collection.

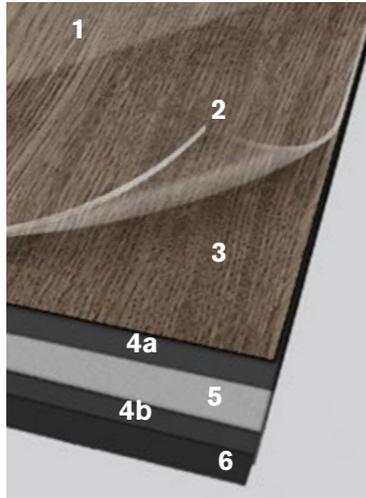

## High Performance from Top to Bottom.

1. **Ceramor+™ Coating.** Minimizes everyday scratching and scuffing.
2. **Wear Layer.** High quality layer enabling 15 years of resilience and performance.
3. **Print Film.** Provides outstanding visuals of natural materials and Interface innovative designs.
- 4a 4b. **Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
5. **Fiberglass.** Adds dimensional stability and controlled flexibility.
6. **Sound Choice™.** Provides comfort and superior acoustic performance.

## Third Party Certification.

**Carbon Neutral Floors.** All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.



Carbon Neutral Floors™



**Environmental Product Declaration (EPD).** Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.



**Sustainable Assessment.** Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

**Indoor Air Quality.** All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.



**Lloyd's Register Statement of Compliance.** All Interface vinyl flooring has been assessed and verified by Lloyd's Register Quality Assurance ensuring compliance with the Green Building Council of Australia's "Guidelines for Best Environmental Practice PVC" and recognised under its Green Star Rating scheme.

## Specifications

### Northern Grain | LVT

Product Name / Number	A026
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	ISO 10874 Class 33 (heavy contract) ISO 10874 Class 42 (light industrial general) ISO 10140-3 ΔLw = 16dB
Acoustic Impact Noise Reduction	
Finish	CERAMOR+™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25 x 100 cm

### Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m2
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class Bfl-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586:2013	R10/P3

### Environmental Specifications

Total Recycled Content	39%
EPD for LVT	
Ingredients and Life Cycle Impacts	NSF/ANSI 332, Meets Certification Guidelines
Sustainability Assessment	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
LEED v4	Fully Recyclable to carpet tile Backing Recycling
End of Life	

### Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Methods	Ashlar, Herringbone



Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

**[www.interface.com](http://www.interface.com)**

**Australia**

Interface Australia  
local toll free: 1800 804 361

**India**

Interface India  
tel: +91 80 4613 1313

**South East Asia**

Interface Asia  
tel: +65 6478 1510

**South Korea**

Interface South Korea  
tel: +82 2 555 1734

**Japan**

Interface Japan  
tel: +81 3 5733 5211

**Beijing**

Interface China  
tel: +86 10 6590 7810

**Hong Kong**

Interface China  
tel: +852 2802 0838

**Shanghai**

Interface China  
tel: +86 21 6340 3868

08/2023



Climate change is undeniable. And reversible. Our mission is to prove it. **Join the #ClimateTakeBack and help create a climate fit for life.**