



Studio Set | LVT

Interface®

Who doesn't love a bold choice? With Studio Set™ LVT, we encourage you to embrace a saturated spectrum of daring brights and warm neutrals—and take note of the subtle woodgrain pattern that suggests texture without demanding attention. Go beyond conventional solutions to create inspiring spaces with pure color and unique composition.

And at Interface, we're 'all in' on becoming a restorative business, driving toward positive impacts. As part of our commitment, Studio Set contains 39% recycled content and is recyclable in the 4.5 mm format through our ReEntry™ program.







Specifications

Product Number	A007
4.5 mm	C012
3.0 mm	
Product Construction	High Performance Luxury Vinyl Tile
Class/ASTM F1700	Class III Printed Vinyl Tile
Wear Layer Thickness	22 mil
Total Thickness	4.5 mm and 3.0 mm options available
Backing Class	Commercial Grade
Finish	Ceramor™ Coating
Nominal Dimensions	25 cm x 1 m (9.845 in x 39.38 in)
Total Recycled Content (Pre Consumer)	39%
Indoor Air Quality	GREENGUARD Gold FloorScore® Certified
Environmental Certifications	CDPH 01350 Compliant
LEED v4	NSF/ANSI 332 Silver Contributes to multiple IEQ and MR credits

View the full product specification on [interface.com](https://www.interface.com)

Installation Methods



ASHLAR



HERRINGBONE

Ready for More?

Find the latest color options, formats and full specifications on [Interface.com](https://www.interface.com). Create an account or login to take the next step for your project.

4.5 mm LVT



CHECK AVAILABILITY
ORDER SAMPLES

3.0 mm LVT



CHECK AVAILABILITY
ORDER SAMPLES

Studio Set™ Color Range



4.5 mm A00701 SILVERLIGHT
3.0 mm C01204 SILVERLIGHT



4.5 mm A00702 PEWTER
3.0 mm C01203 PEWTER



4.5 mm A00703 PEPPER
3.0 mm C01202 PEPPER



4.5 mm A00704 ESPRESSO



4.5 mm A00705 TITANIUM
3.0 mm C01205 TITANIUM



4.5 mm A00706 MUSHROOM
3.0 mm C01201 MUSHROOM



4.5 mm A00708 IRIS
3.0 mm C01207 IRIS



4.5 mm A00709 OCEAN
3.0 mm C01209 OCEAN



4.5 mm A00710 POPPY
3.0 mm C01211 POPPY



4.5 mm A00712 MARIGOLD
3.0 mm C01208 MARIGOLD



4.5 mm A00713 SLATE
3.0 mm C01213 SLATE



4.5 mm A00715 CHARTREUSE
3.0 mm C01206 CHARTREUSE



4.5 mm A00716 ORANGE
3.0 mm C01210 ORANGE



4.5 mm A00717 RED



4.5 mm A00718 DEEP FUCHSIA



4.5 mm A00719 VIOLET



4.5 mm A00720 ROYAL BLUE
3.0 mm C01212 ROYAL BLUE



4.5 mm A00721 ELECTRIC BLUE



4.5 mm A00722 AQUA



4.5 mm A00723 KELLY GREEN



4.5 mm A00724 TURQUOISE
3.0 mm C01214 TURQUOISE



4.5 mm A00725 DARK GREEN



4.5 mm A00726 PEBBLE



4.5 mm A00727 SAND

Why Our Modular Resilient LVT?



Integrated System

Save time and look good doing it. Our LVT integrates with our full product portfolio, allowing you to streamline specification and installation. Add our modular carpet for an inset rug or nora® in an adjacent field.


For a no transition strip solution, opt for our:

- 4.5 mm LVT to any carpet tile
- 3.0 mm LVT to most 17 oz or less carpet tile on GlasBac™ or CQuest™GB backing
- 3.0 mm LVT to our nora rubber flooring



Easy Maintenance

Create a unique look that lasts. Interface LVT extends the life of your floor. From simple damp mopping to selectively replacing 4.5 mm Sound Choice LVT tiles, your flooring investment will stand the test of time - beautifully and effortlessly.



ReEntry™

Keep flooring out of the landfill. All of our LVT is produced with a controlled material stream, and 4.5 mm Sound Choice LVT can be reclaimed and recycled along with Interface carpet tile through our ReEntry program. ReEntry is the only third party certified recycling system among North American flooring manufacturers.




Noise Reduction

Silence distractions. 4.5 mm Sound Choice is a specially formulated backing for superior noise reduction, offering you best-in-class impact sound reduction and floor to floor sound transmission.




High Performance from Top to Bottom

4.5 mm Sound Choice™ LVT

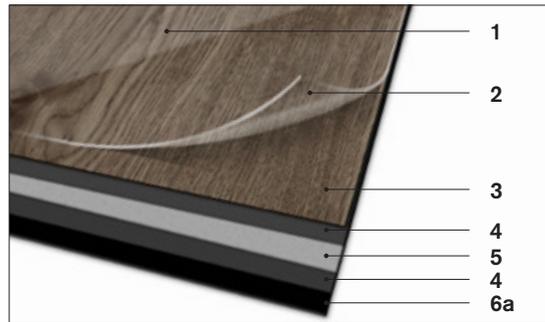

3.0 mm LVT

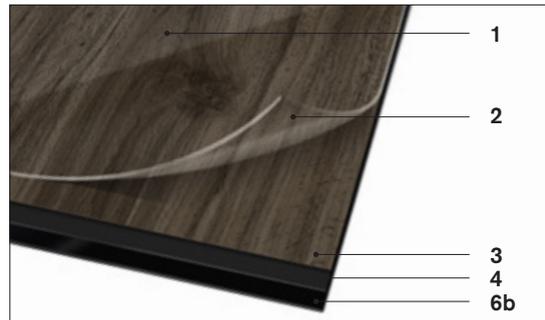

- 1. Ceramor™ Coating.** Scratch and scuff resistant, UV stabilized ceramic bead coating.
- 2. Wear Layer.** High quality, 22 mil layer enabling 15 years of resilience and performance.
- 3. Print Film.** High definition wood looks, stone looks and innovative Interface designs.
- 4. Core Sheet.** Provides stabilization and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6a. Sound Choice Backing.** Provides added comfort and superior acoustic performance.
- b. Backing.** Provides greater resistance to residual indentation.



Environmental Product Declaration (EPD)

A third party verified statement of product ingredients and environmental impacts over the entire life cycle of a product.



GREENGUARD Gold & FloorScore®

Meeting the highest standards for indoor air quality and assuring very low emissions of VOCs, Interface LVT is GREENGUARD Gold and FloorScore® Certified and CDPH 01350 compliant.



Health Product Declaration (HPD)

A transparency tool for evaluating if a product includes materials of concern and whether it supports Green Chemistry.



NSF/ANSI 332 Silver

This standard evaluates the environmental impact of resilient floor covering for its entire life cycle.

📍 Samples

Register and order samples at [interface.com](https://www.interface.com). Not near a computer? You can also request samples by calling one of the numbers below.

United States
1.877.605.1500

Canada
1.866.398.3192

interface.com

Do more on [interface.com](https://www.interface.com)

- Browse products and order samples
- Save and share favorites
- See images of products in a variety of room scenes
- Browse floor designs, change colors, upload your own image, download and share
- Get full specifications, sustainability certifications and more
- Check order status and inventory availability
- Sign up to get the latest information on Interface products and news

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see [interface.com/disclaimer](https://www.interface.com/disclaimer).



PLEASE RECYCLE

Printed on 50% post consumer waste (PCW)
fiber manufactured using wind power.

interface.com

United States Headquarters

1280 West Peachtree Street NW
Atlanta, GA 30309
1.800.634.6032

Canadian Headquarters

233 Lahr Drive
Belleville, ON K8N 5S2
1.800.267.2149 ext. 52128

CIM# IFS00955 01/2025