英特飞做出了零任务承诺，即在2020年之前，彻底消除对环境造成的任何负面影响，为了兑现这个承诺，我们一直都在思索每一个创意、生产和建筑决策对环境的影响。

As part of Interface's Mission Zero promise to eliminate any negative impact on the environment by 2020, we always consider the environment impact of every creative, manufacturing and building decision.

www.interface.com.cn

/ Shanghai Studio
英特飞中国 / Interface China
tel: 86-21-6340 3868
www.interface.com.cn

/ Hongkong Studio
英特飞中国 / Interface China
tel: 852-2802 0838
www.interface.com.cn

/ Beijing Studio
英特飞中国 / Interface China
tel: 86-10-6590 7812
www.interface.com.cn

/ Taicang Plant
英特飞中国 / Interface China
tel: 86-512- 5373 9888
www.interface.com.cn

/ Guangzhou Studio
英特飞中国 / Interface China
tel: 86-20-3869 2887
www.interface.com.cn

/ South East Asia
英特飞亚洲 / Interface Asia
tel: 65-6478 1510
www.interface.com

/ South Korea
tel: 82-2-555 1734
www.interface.com

/ Japan
英特飞日本 / Interface Japan
tel: 81-3-5733 5211
www.interface.com

/ Australia
英特飞澳大利亚 / Interface Australia
local toll free: 1800 008 101
www.interface.com.au

10/2018
SF0110T0

mission Ø®

C + CLIMATE TAKE BACK™

Climate change is undeniable. And reversible. Our mission is to prove it.
Join the #ClimateTakeBack and help create a climate fit for life.

(IFSCN-201810)

Studio Set | LVT

Interface®

Studio Set™

每个项目都是获得新想法的好机会Studio Set介绍。高级弹性地板（LVT）系列有13种颜色可供选择。Studio Set拥有一系列色彩组合，从超饱和的亮色到理想的中性色，多种多样。请注意那些极其微妙的木纹图案设计，但千万不要陷入常规解决方案。这些Skinny Planks™系列地板旨在激发您使用纯色设计，创造出独特的空间搭配或做出大胆选择，如使用红色地毯。

将Studio Set系列与英特飞方块毯并排组合，形成由Skinny Planks和方块毯构成的软硬一体地面系统。英特飞模块地毯可以轻松移动，无需过渡条。

当然，我们设计的所有产品都能够回收，都可以为我们的回收计划ReEntry®提供支持。我们时刻致力于不断减少对环境的影响。

Every project is an opportunity for fresh ideas. Enter Studio Set. Thirteen hues selected to serve as your go-to source for colour in LVT. Studio Set is a spectrum of colours from super-saturated brights to ideal neutrals. Take note of the very subtle woodgrain pattern, but don't get stuck in conventional solutions. These Skinny Planks™ were meant to inspire you to design with pure colour, creating unique compositions or just making a singular bold choice, like a red floor.

Combine Studio Set with Interface carpet tiles side-by-side for an integrated flooring system of hard and soft tiles in Skinny Planks and squares. Interface modular floors allow you to move from surface to surface without the need for transition strips.

And, of course, we design all our products with the ability to feed our recycling program, ReEntry®. We're mindful of our commitment to continually minimize our environmental footprint.

(/ COVER) **LVT** / **LVT PRODUCT** STUDIO SET / **COLOUR** MUSHROOM
/ **INSTALLED** / ASHLAR / **CARPET PRODUCT** MOD CAFÉ™
/ **COLOUR** STAR NATURAL / **INSTALLED** / NON DIRECTIONAL

/ **PRODUCT** STUDIO SET / **COLOUR** SLATE / **INSTALLED** / ASHLAR

/ **PRODUCT** STUDIO SET   / **COLOURS** PEPPER, PEWTER
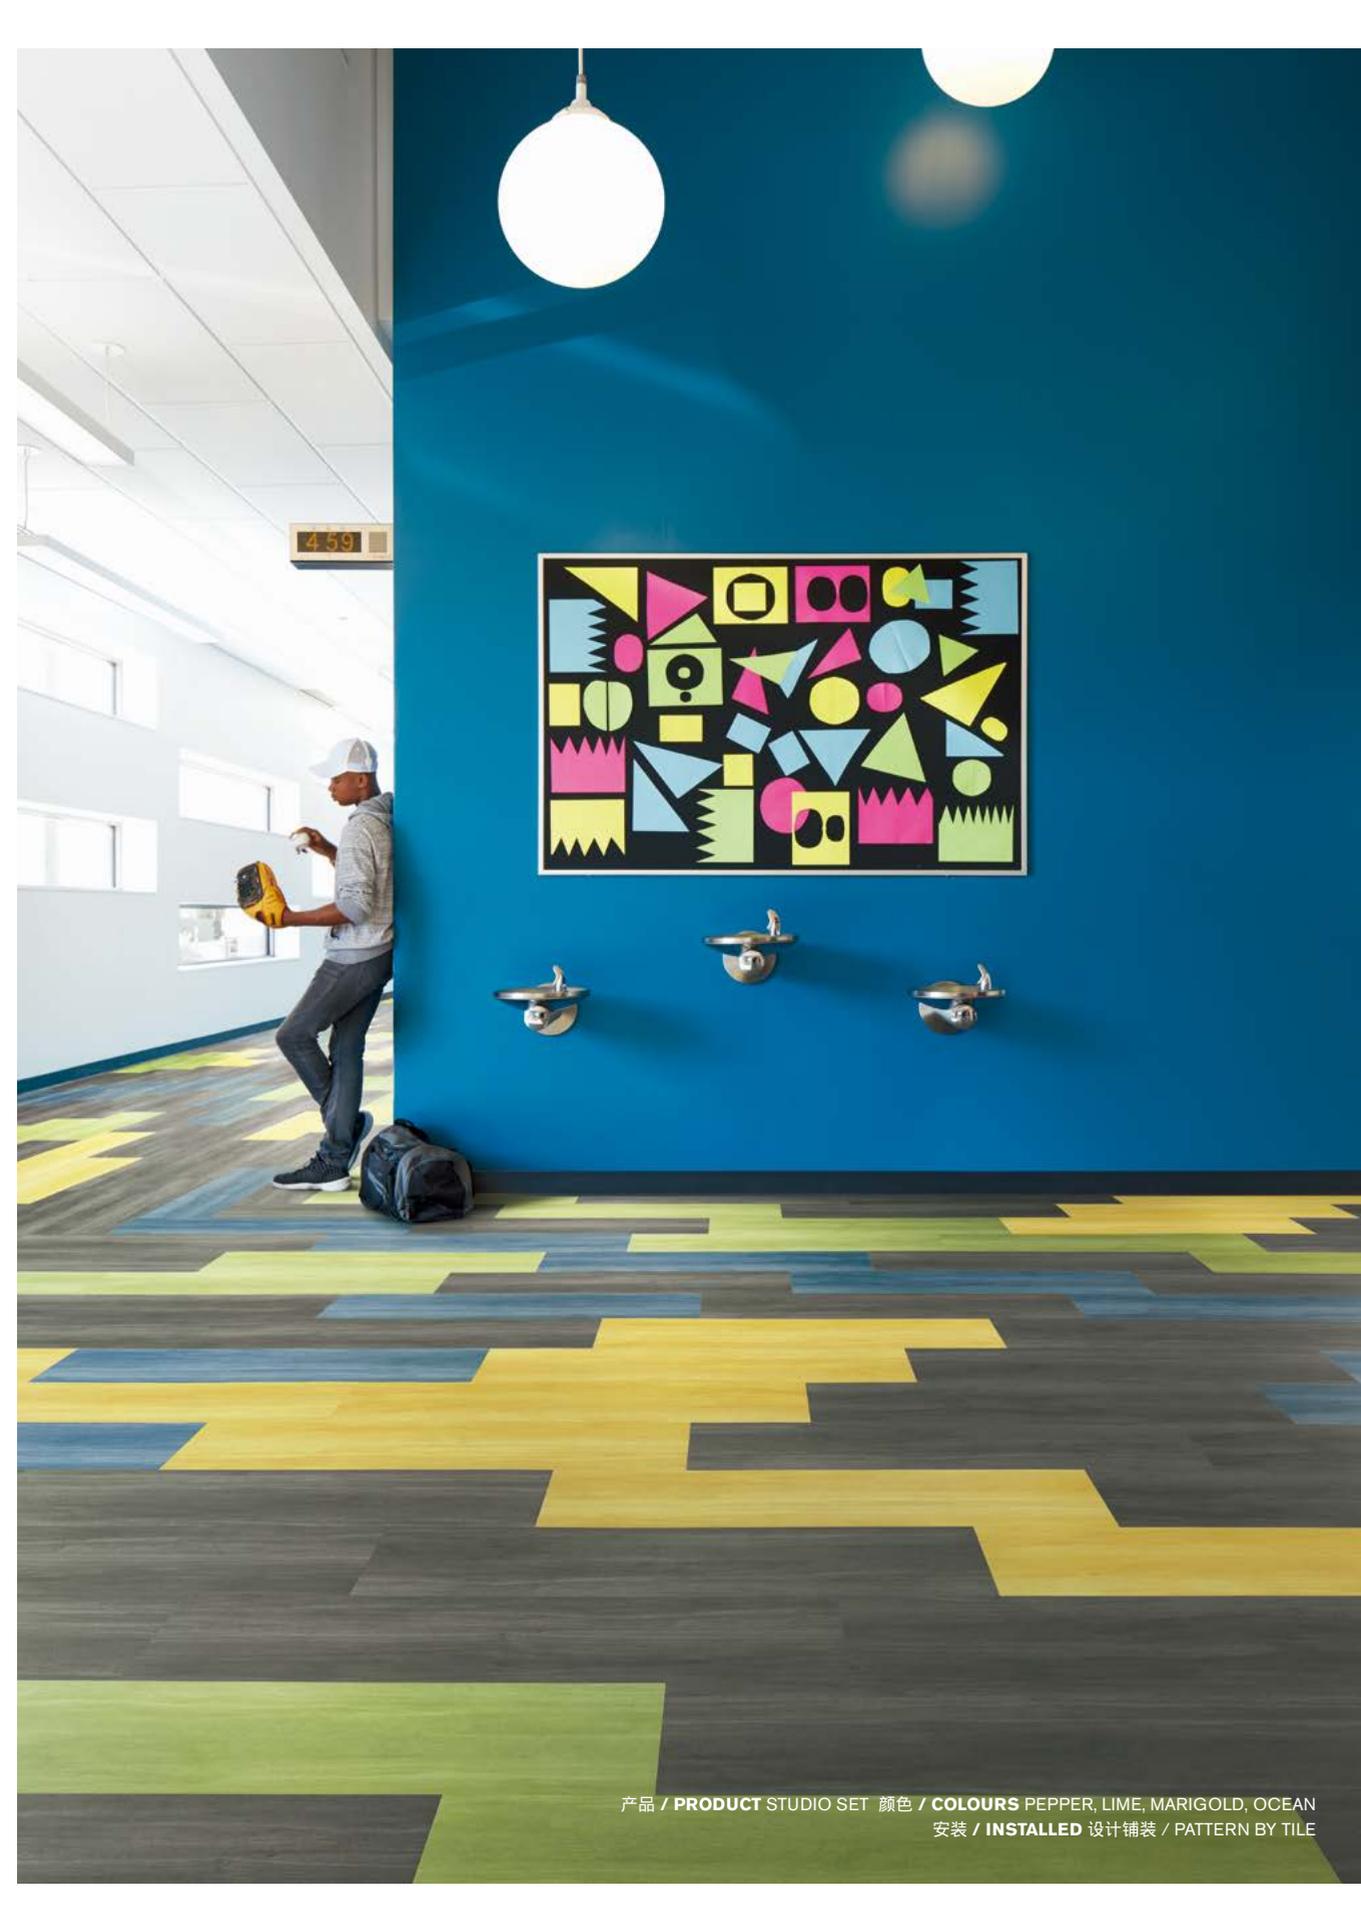   / **INSTALLED**   / PATTERN BY TILE

LVT / **LVT PRODUCT** STUDIO SET / **COLOURS** PEWTER, MANDARIN / **INSTALLED** / PATTERN BY TILE
/ **CARPET PRODUCT** AERIAL™ | NEIGHBORHOOD™ BLOCKS / **COLOUR** PERSIMMON/BLOCKS
/ **INSTALLED** / ASHLAR / **CARPET PRODUCT** STEP REPEAT™ | SR799
/ **COLOUR** GRANITE / **INSTALLED** / QUARTER-TURN

/ **PRODUCT** STUDIO SET / **COLOURS** PEWTER, SLATE
/ **INSTALLED** / PATTERN BY TILE

LVT   / LVT PRODUCT STUDIO SET   / COLOUR TITANIUM   / INSTALLED   / ASHLAR
/ CARPET PRODUCT HUMAN CONNECTIONS™ | STONE COURSE™
/ COLOURS ORANGE/STONE,TEAL/STONE, PURPLE/STONE
www.interface.com.cn   / INSTALLED   / PATTERN BY TILE

/ PRODUCT STUDIO SET   / COLOURS PEPPER, LIME, MARIGOLD, OCEAN
/ INSTALLED   / PATTERN BY TILE

Studio Set

产品编号	A007
产品结构	高性能豪华乙烯高性能长条地板
耐磨层厚度	0.55 mm
总厚度（公制）	4.5 mm
类别	EN 651 类别 33 (公共场合)
	EN 651 类别 42 (轻工通用)
声振降噪	ISO 140.8 ΔLw = 16dB
饰面	CERAMOR(tm)，紫外线稳定的陶瓷珠涂层
标称尺寸	25cm x 100cm

临界热通量	AS ISO 9239-1	>7kW/m^2
烟度雾	AS ISO 9239-1	<750%.min
尺寸，公差	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
尺寸稳定性	ISO 23999	<0.25%
厚度	ISO 24346	平均值 + 0.20mm
耐光性能	ISO 105-B02	≥6
耐热性能	ASTM F1514	ΔE< 8 平均最大值
耐化学品性能	EN-ISO 26987	通过
抗火性能	EN ISO 13501-1	类别 BFI-S1
VOC测试	ISO 10580	通过
灵活性	ISO 24344 方法A	通过
静载重	ASTM F970	≤0.005" (在1500 psi时)
脚轮磨耗	ISO 4918	通过
导热性能	EN 12667	0.16 W/mK
静电性能	EN 1815	<2kV
防滑性能	AS 4586:2014	R10

成分和生命周期影响	EPD 用于高级弹性地板
可持续性评估	NSF/ANSI 332, 符合认证准则
LEED v4	符合IEQ；低挥发性材料标准；M&R：EPD和EPR
产品寿命末期	从完全可回收的LVT到地毯底面回收

铺装	详见Interface LVT在线铺装指南
维护	详见Interface LVT在线维护指南
回收	参阅ReEntry®项目的相关详细信息
保修	15年标准LVT产品商业质保
铺装方法	上下错半，人字形

上下错半   人字形

Specifications

Product Number	A007
Product Construction	High Performance Luxury Vinyl Plank
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract)
	EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔL$_w$ = 16dB
Finish	CERAMOR(tm) UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

Performance Specifications

Critical Heat Flux	AS ISO 9239-1	>7kW/m^2
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586:2014	R10

Environmental Specifications

Ingredients and Life Cycle Impacts	EPD for LVT
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
End of Life	Fully Recyclable to carpet tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	View details on our ReEntry® Program
Warranty	15 Year Standard LVT Product Warranty
Installation Methods	Ashlar, Herringbone

Ashlar   Herringbone

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information please see our full LVT product disclaimer.

所有产品技术参数平均值均来源于产品样品的测试结果，实际产品的测试公差和图案会有细微差异，可能会随时更新，恕不另行通知。更多关于这些和其他产品的重要属性的描述信息，包括回收成分和产品质保信息，请参阅我们LVT产品的免责说明。

GREEN TAG CERTIFIED
trust brands™

A007-01 SILVERLIGHT

A007-02 PEWTER

A007-03 PEPPER

A007-04 ESPRESSO

A007-05 TITANIUM

A007-06 MUSHROOM

A007-07 LIME

A007-08 IRIS

A007-09 OCEAN

A007-10 POPPY
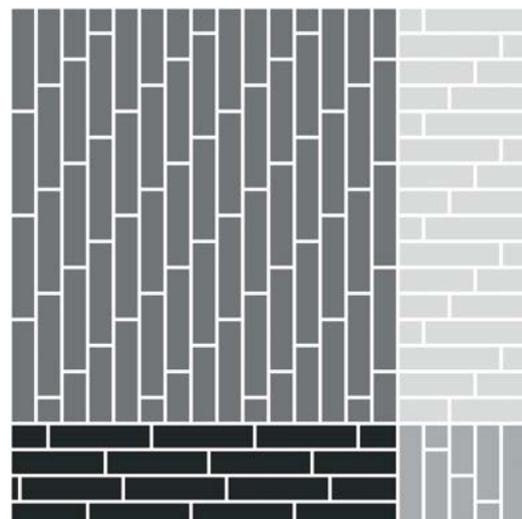
A007-11 MANDARIN

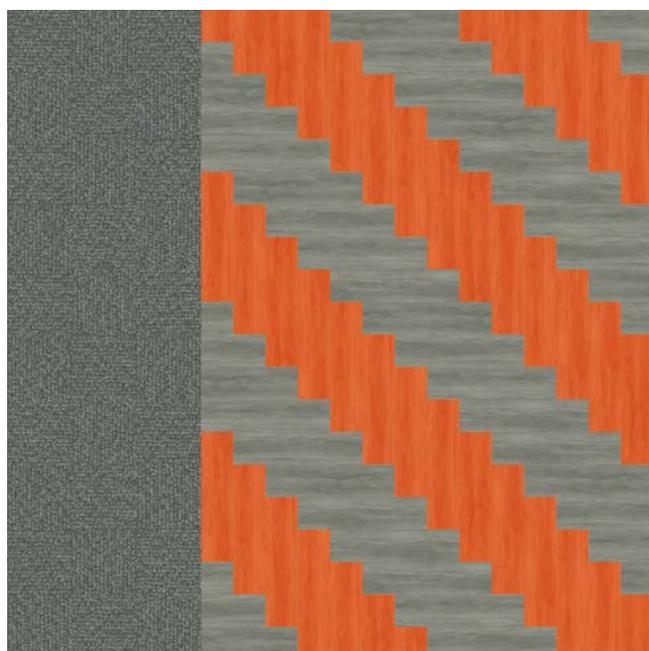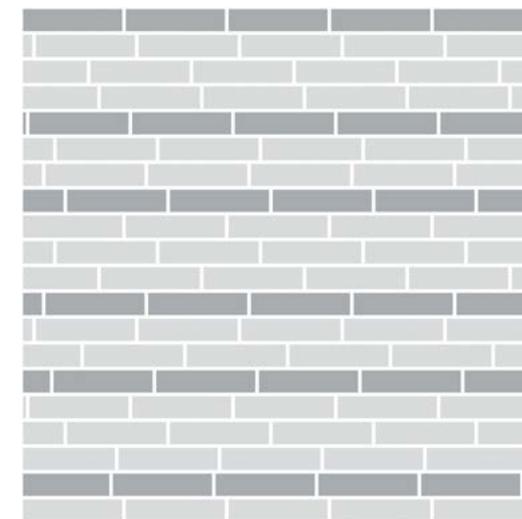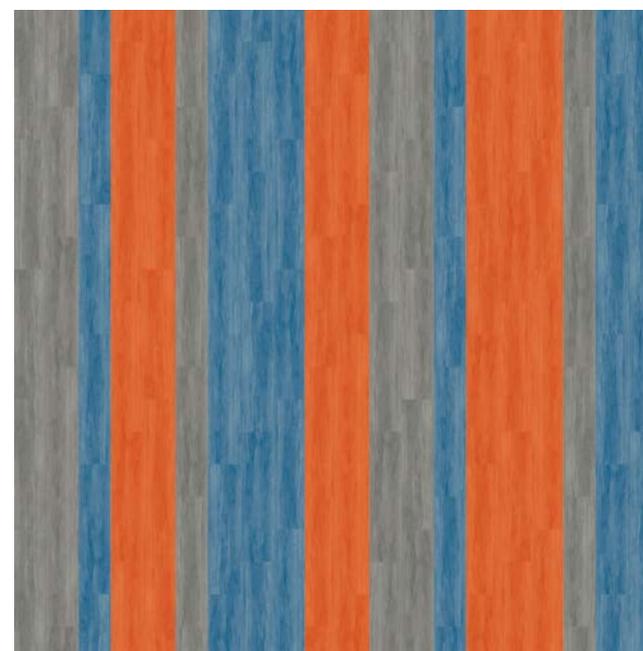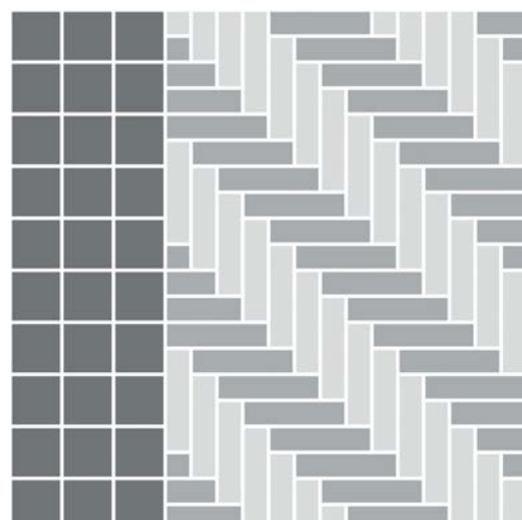A007-12 MARIGOLD

A007-13 SLATE

设计方案 以下为建议铺装方式

Design Ideas   Below are floor layouts showing how to create the design ideas shared in several of the images featured in this brochure.

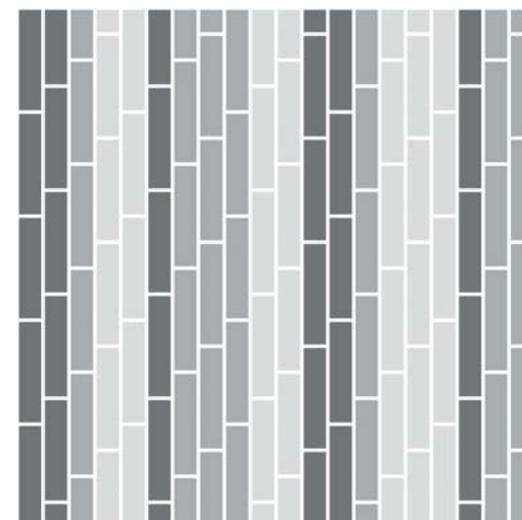**/ PRODUCT** STUDIO SET   **/ COLOURS** SILVERLIGHT, PEWTER, OCEAN, MANDARIN
/ INSTALLED   / PATTERN BY TILE (/ ASHLAR)

/ PRODUCT STUDIO SET   **/ COLOURS** PEWTER, SLATE
/ INSTALLED   / PATTERN BY TILE (/ ASHLAR)

LVT   **/ LVT PRODUCT** STUDIO SET   **/ COLOURS** PEWTER, MANDARIN
/ INSTALLED   / PATTERN BY TILE (/ HERRINGBONE)
/ COLOUR GRANITE   **/ INSTALLED**   / QUARTER-TURN

/ CARPET PRODUCT STEP REPEAT | SR799

/ PRODUCT STUDIO SET   **/ COLOURS** PEWTER, OCEAN, MANDARIN
/ INSTALLED   / PATTERN BY TILE (/ ASHLAR)

/ **PRODUCT** STUDIO SET　　　/ **COLOURS** PEPPER, PEWTER
/ **INSTALLED**　　　/ PATTERN BY TILE

/ **PRODUCT** STUDIO SET　　　/ **COLOURS** ESPRESSO, TITANIUM, POPPY
/ **INSTALLED**　　　/ PATTERN BY TILE (　　　/ ASHLAR)
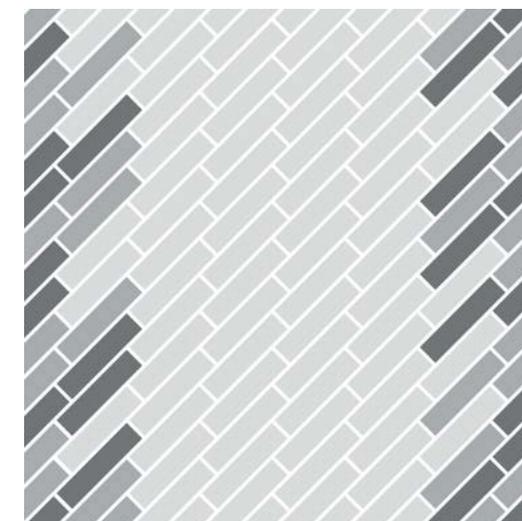
/ **PRODUCT** STUDIO SET　　　/ **COLOURS** PEPPER, LIME, MARIGOLD, OCEAN
/ **INSTALLED**　　　/ PATTERN BY TILE (　　　/ ASHLAR)
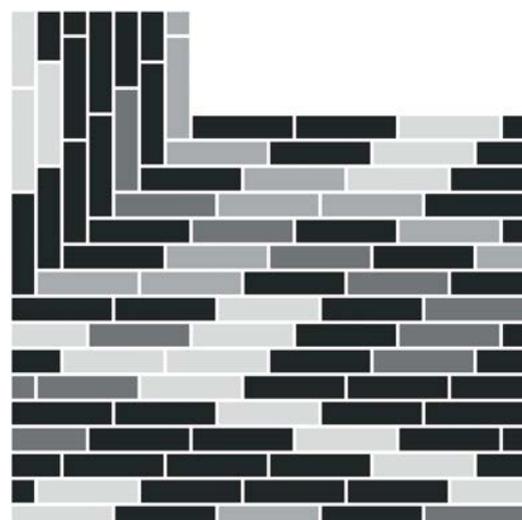
/ **PRODUCT** STUDIO SET　　　/ **COLOURS** SILVERLIGHT, PEWTER, PEPPER, MARIGOLD
/ **INSTALLED**　　　/ PATTERN BY TILE

LVT

Interface Modular Resilient LVT
and Modular Carpet allow you to
seamlessly move from hard to soft
surfaces. No transition strip needed.

为什么选择我们的模块化高级弹性地板系列（LVT）系列产品?
Why Our Modular Resilient LVT?

综合性系统。

告别过渡嵌条与叠加。 我们的模块弹性地板专为配合我
们的模块化方块地毯而设计。我们的产品具备兼容性尺
寸和高度，让您可以将模块化地毯整合为一块嵌入式地
毯，或相邻区域，而无需过渡嵌条。你可以避免材料叠
加，并节省资金。

真正的灵活性。

可创造出永不过时的独特视觉效果。 英特飞模块化弹性
LVT系列产品可轻松延长地板的使用寿命。从简单的维
护（如湿擦）到选择性地更换受损地板，您购买的地面
产品既外观精美，又能轻松维护，经得起时间的考验。

回收系统。

让地板远离垃圾填埋场。 我们的模块弹性LVT由受控材
料流生产，因此可以通过我们的ReEntry®计划回收并再
生产为我们的GlasBac®RE回收材料。

降噪。

消除干扰。 通过LVT系列产品和Sound Choice™背衬，英
特飞可助您打造+正能量空间。其卓越的降噪特性获得
了Quiet Mark™认证，在降低碰撞声音以及地板间的声音
传播方面表现出色。

Integrated System.

Say goodbye to transition strips and doubling up. Our modular
resilient floorings are made to work as a system with our
modular carpet. The compatible size and height of our products
allows you to integrate modular carpet for an inset rug or an
adjacent field – no transition strip required. You'll avoid doubling
up on materials and save money.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient
LVT makes it easy to extend the life of your floor. From simple
maintenance like damp mopping to selectively replacing
damaged tiles, your flooring investment will stand the test of
time - beautifully and effortlessly.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT
is produced with a controlled material stream so it can be
reclaimed and recycled into our GlasBac® RE recycled content
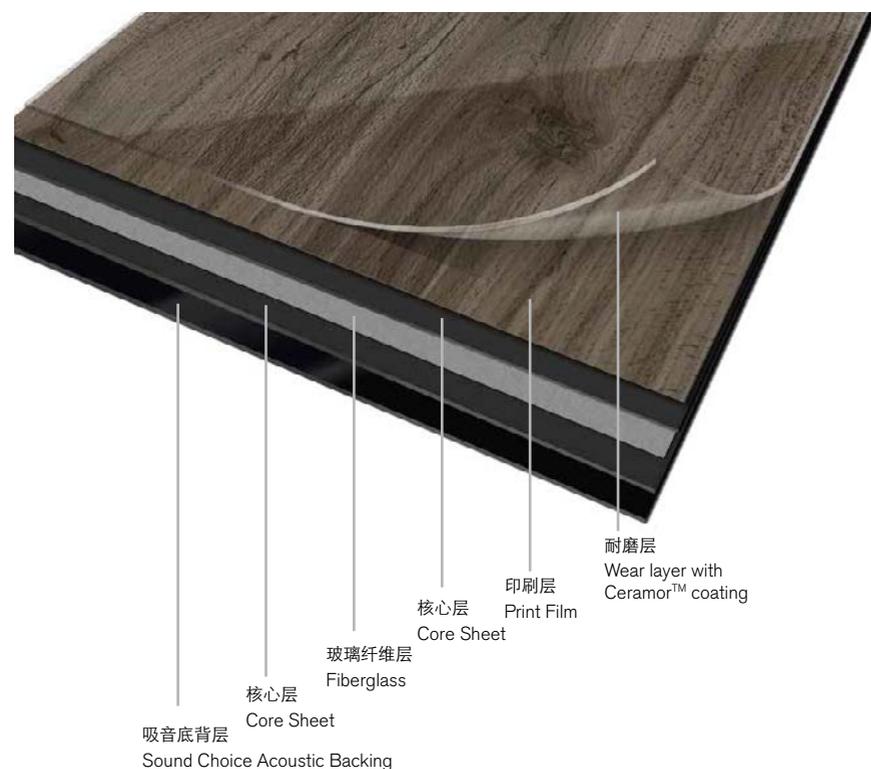backing through our ReEntry program.

Noise Reduction.

Silence distractions. Interface is helping create +Positive spaces
with our LVT with Sound Choice™ backing. It's Quiet Mark™
certified for its superior noise reduction qualities, offering you
best-in-class performance for reduced impact sound and floor to
floor sound transmission.

为什么选择我们的模块化高级弹性地板系列（LVT）系列产品？（续）
Why Our Modular Resilient LVT? (continued)

耐磨层
Wear layer with
Ceramor™ coating

印刷层
Print Film

核心层
Core Sheet

玻璃纤维层
Fiberglass

核心层
Core Sheet

吸音底背层
Sound Choice Acoustic Backing

从头到脚的高性能。

从我们的Ceramor™表面涂层，到我们的Sound Choice™底面涂层，我们的模块化高弹LVT设计旨在提供最顶级的性能，即使处于最具挑战性的工作环境中，也能实现出色的噪声吸收效果。

耐磨性。我们的Ceramor陶瓷珠涂层提供的耐久表面可以抵抗划痕和磨损，让你的地板历久弥新。压花纹理则进一步提高耐久性。

强大的核心。两层核心层之间的玻璃纤维层带来卓越的尺寸稳定性和灵活性，实现全能性的模快化系统、效率移动以及轻松换新的功能。

安静的舒适。（关键在于"安静"）。我们Sound Choice底面的IIC评分为57，可以提供出色的垂直声波传递防护。最小化噪音可以提高工作场所的效率，并创造更多可用的舒适空间。

High Performance from Top to Bottom.

From our Ceramor™ Top Coat to our Sound Choice™ backing, we've designed our modular resilient LVT to provide peak performance in even the most challenging work environment while also providing superior sound absorption.

Abrasion Resistance. Our Ceramor ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better longer. Embossing adds texture to further enhance durability.

A Strong Core. Incorporating a fiberglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a fully modular installation and the ability to move and update with ease.

Quiet Comfort. (or just "Quiet.") With an IIC rating of 57 our Sound Choice backing provides superior protection against vertical sound transfer. Minimizing noise enhances workplace productivity and creates more usable, comfortable spaces.

/ **PRODUCT** STUDIO SET   / **COLOUR** POPPY   / **INSTALLED**   / Ashlar